



A WATTS Brand

238

Towel Dispenser/Waste Receptacle

Model 238 — Recessed**Model 238-10 — Semi-Recessed****(recesses 3½"; projects 4")****Model 238-11 — Surface-Mounted****(projects 7½")**
 Standard Series - Satin Finish
Product Materials

CABINET: 22-gauge stainless steel with exposed surfaces in architectural satin finish. Welded construction with seamless corners and burr-free edges.

FLANGE: 22-gauge stainless steel with exposed surfaces in architectural satin finish. One piece seamless construction, 1" wide with ¼" return.

DOORS: 18-gauge stainless steel. Warp resistant, with full length piano hinge and tumbler lock keyed like other Bradley units.

TOWEL DISPENSER: 22-gauge stainless steel. Rolled edge on dispenser opening.

WASTE CONTAINER INSERT: Leak-proof molded plastic.

CUP DISPENSER (optional): 22-gauge stainless steel.

Capacity

Towel Dispenser — 1100 single-fold, 800 multi-fold or 500 C-fold paper towels; Waste Receptacle Insert — 8.2 gal. (1.1 cu. ft.); Cup Dispenser (optional) — 100 - 3 oz. cups

Operation

Towel dispenser holds single-fold, multi-fold or C-fold towels with use of special adaptor. Waste receptacle insert removable for easy servicing by unlocking waste container.

Installation

Verify all rough-in dimensions prior to installation. Recessed unit requires rough wall opening 15¾"W x 54¾"H x 7½"D (Semi-recessed unit only 3½" deep). Secure to framing with mounting screws (included) at holes provided. Shim at screw points as required. Surface-mounted units must have holes drilled by installer.

Guide Specification

Recessed combination towel dispenser and waste receptacle shall be fabricated of 22 gauge stainless steel with exposed surfaces in satin finish. Cabinet doors with full length piano hinge and secured by tumbler locks. Towel dispenser capacity 1100 single-fold, 800 multi-fold or 500 C-fold towels. Removable 8.2 gal. leakproof molded plastic insert for waste receptacle.

Overall dimensions: 17-1/8"W x 56"H x 7-1/2"D.


ADA Compliant


- Consult local and national accessibility codes for proper installation guidelines.
- Conformity and compliance to local and national codes is the responsibility of the installer.



A WATTS Brand

Towel Dispenser/Waste Receptacle

Dimensions

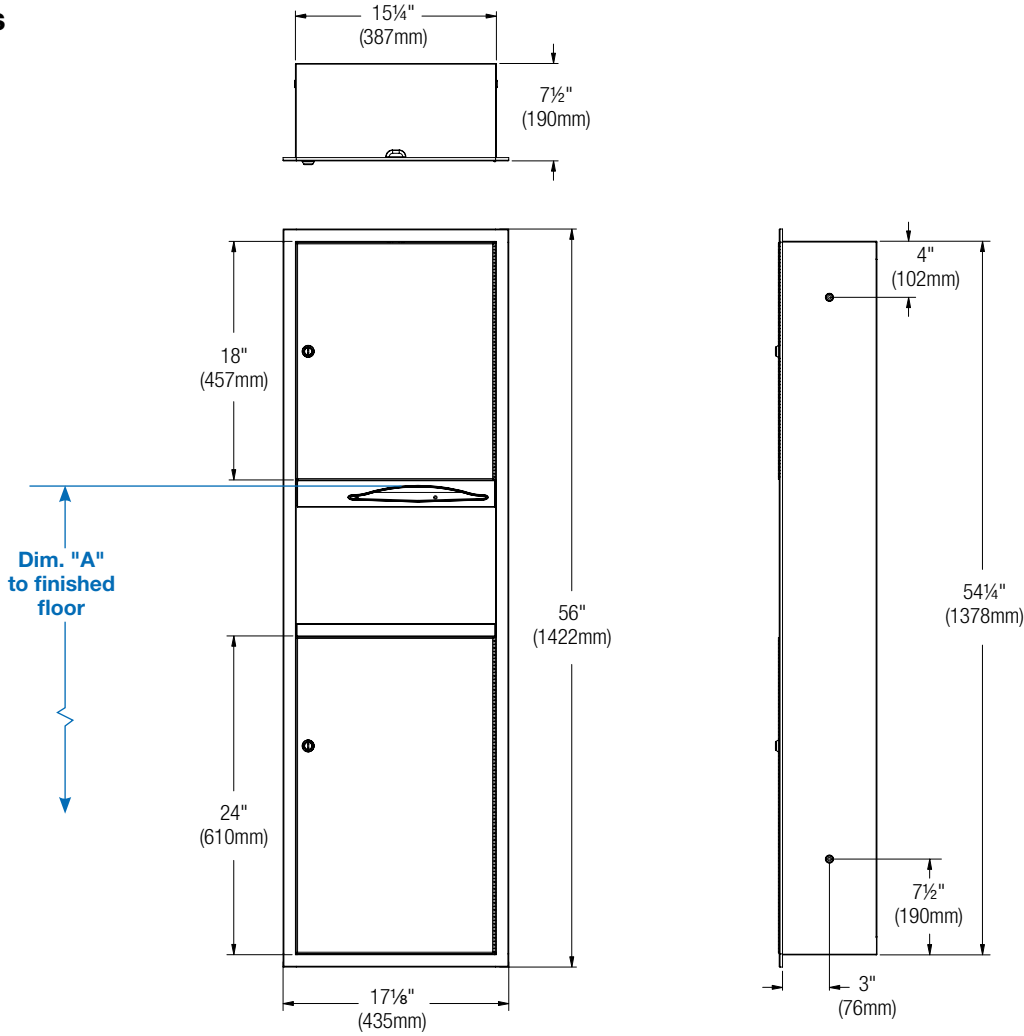

Dim. "A" Key Surface:	For Dim. "A"	Top of Rough Wall Opening	Bottom of Rough Wall Opening
Paper towel top of opening to finished floor	48" (1219mm)	66 3/4" (1695mm)	12" (305mm)
	45" (1143mm)	63 3/4" (1619mm)	9" (229mm)
	42" (1067mm)	60 3/4" (1543mm)	6" (152mm)
	40" (1016mm)	58 3/4" (1492mm)	4" (102mm)
Rough wall opening:			
Surface Mount:	No rough opening, see overall dimensions		
Recessed:	15 3/4" (401mm) Wide x 54 3/4" (1391mm) High x 7 1/2" (191mm) Deep		
Semi-Recessed:	15 3/4" (401mm) Wide x 54 3/4" (1391mm) High x 3 1/2" (89mm) Deep		