



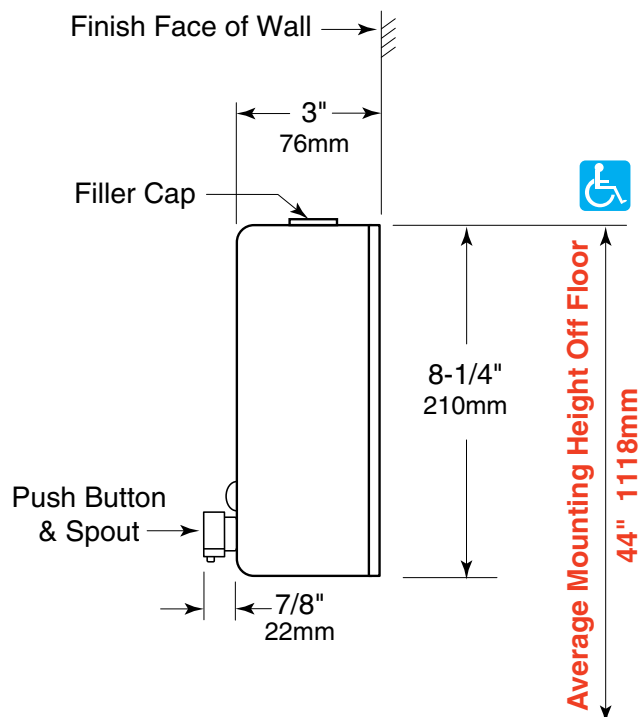

SURFACE-MOUNTED VERTICAL TANK-TYPE SOAP DISPENSER WITH ALL-PURPOSE VALVE

G-16AP

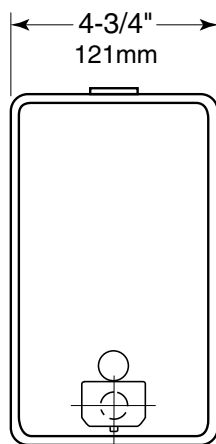

CONSTRUCTION:

Fabricated of 22-gauge (.759mm) type 304 satin finished stainless steel. Body of dispenser is welded to back panel. View level indicator is clear plastic. Valve is black molded plastic push button with antibacterial-soap-resistant plastic cylinder and stainless steel spring.

CAPACITY:

40-fl oz. (1.2-L) of liquid lotion soaps. Hinged filler cap at top of unit is keyed to resist vandalism.

INSTALLATION:

Unit is surface mounted to wall or partition with a wall mounting plate (supplied) and screws (supplied). Unit is secured to interlocking wedge bracket and locked in place by a screw (supplied) installed through rear wall and accessed thru unlatched hinged refill door. Recommended installation for general utility is 42" (1066mm) AFF or 6" (152mm) minimum above washbasin.

MOUNTING:

Mounting location for push button dispensers are 44" (1118mm) maximum above the finish floor. Push buttons and pistons should be operable with one hand and without tight grasping, pinching, or twisting of the wrist. Activation of soap valves should not require more than 5 pounds of force when unit is completely filled.

NOTES:

Wood blocking is preferable behind all wall surfaces. If wood blocking is not available, the following fasteners are suggested:
 Tile/Masonry - Plastic or lead anchors
 Plaster/Drywall - Toggle bolts

Surface-Mounted Vertical Tank-Type Soap Dispenser with All-Purpose Valve shall be Model G-16AP of Gamco Commercial Restroom Accessories, One Gamco Place, Durant, OK, 74701-1910